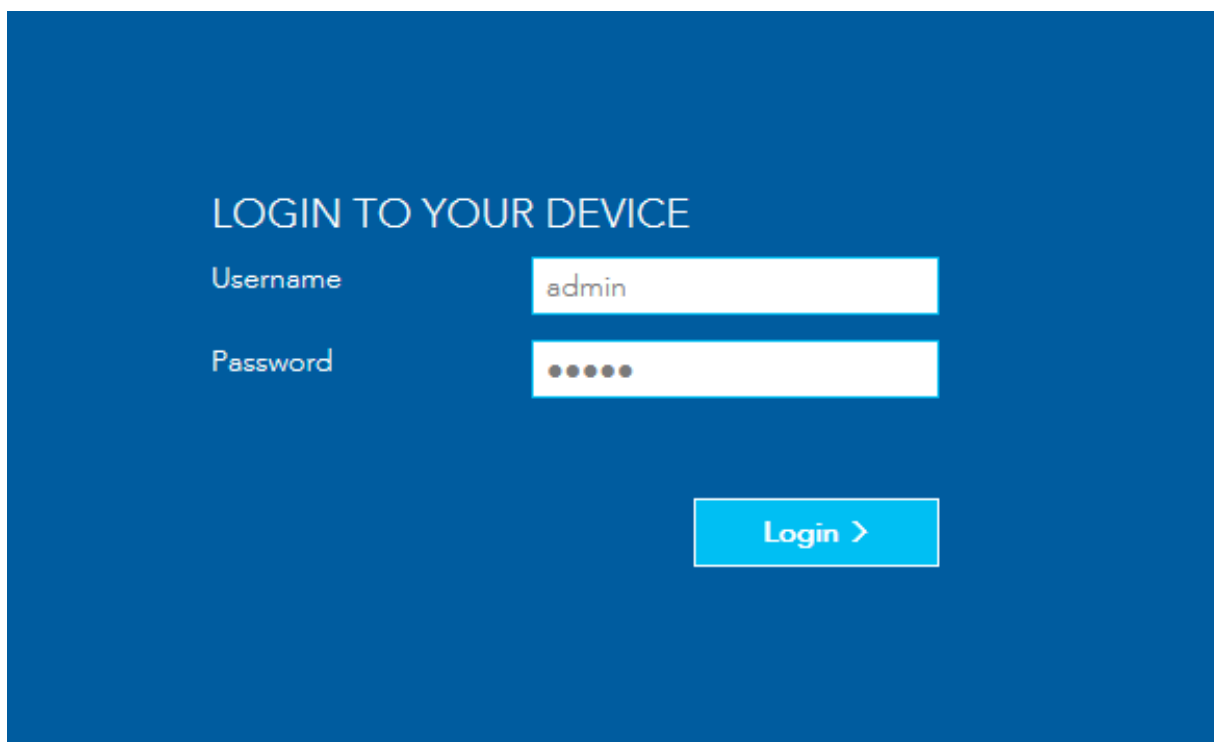


Configuring your Home Phone on a Netcomm NF18ACV NC2 firmware version

1. Log in to the router interface by typing **192.168.20.1** on a browser. Once in, you will be prompted for admin access. Use "admin" for both username and password.

The image shows a login interface for a router. It has a dark blue background. At the top, the text "LOGIN TO YOUR DEVICE" is displayed in white. Below this, there are two input fields. The first is labeled "Username" and contains the text "admin". The second is labeled "Password" and contains six dots. To the right of the password field is a blue button with the text "Login >" in white.

LOGIN TO YOUR DEVICE

Username


Password

Login >

2. You will then be brought to the main page. On the left-hand panel, click on '**Phone**'.



3. The configuration page will then be shown.

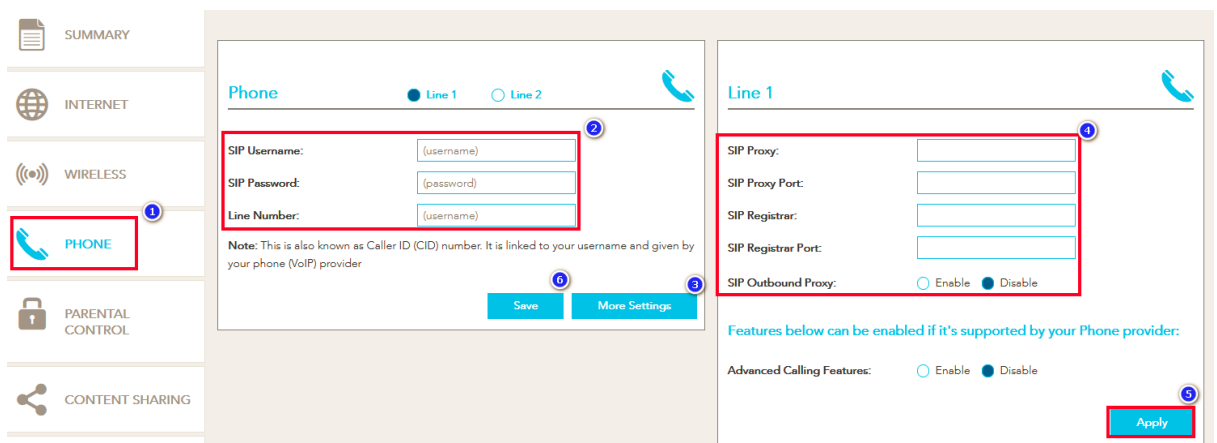

1. Check your email for the phone credentials. Enter the username on the **SIP Username** and **Line number**, then the password on the **SIP password** field respectively.
2. Next, click on **More Settings** to see the rest of the setup.
3. Enter the following details:

SIP Proxy: 203.23.236.96
SIP Proxy Port: 5060
SIP Registrar: 203.23.236.96
SIP Registrar Port: 5060

Note: Other devices may ask for details such as **Authentication Number or other numbers**. Always use your **SIP Username** (provided in the email) and **NOT** your telephone number.

4. Click Apply and then Save.
5. After saving your setup, your VoIP home phone service will then attempt to connect. You will know it is successful when you can see the status as "Up"



Otherwise, check if the phone light on your modem is ON. Restart your modem and check the connection points, make sure to plug the

cable to the correct phone port of your modem (*i.e., use phone port 1 for Line number 1*).

Related Articles:

- [Home Phone Settings](#)
- [Device Configuration for SpinTel Phone \(VoIP\)](#)
- [Can't make or receive calls on your home phone?](#)

Online URL:

<https://articles.spintel.net.au/article/configuring-your-home-phone-on-a-netcomm-nf18acv-nc2-firmware-version.html>