

Setting Up Your NBN Using Your Own (BYO) Modem

Important: If your modem has been purchased from another service provider, you may need to confirm it is not "locked" so it can be used with SpinTel's [NBN service](#), compatible with the [nbn technology](#) at your premises, and that the physical connection is correctly set up as described in this [article](#) before continuing.


How Do You Connect Your BYO Modem?

Depending on your [nbn connection type](#), connect one of the following:


1. If there is no **nbn** Connection Box installed, you'll need to **connect a phone cable from the DSL port on the back of your modem** to your telephone wall socket. This is applicable for FTTN (Fibre to the Node) or FTTB (Fibre to the Basement) **nbn** connection types.



If there is an **nbn** Connection Box installed, you'll need to **connect an ethernet cable from the WAN port on the back of your modem to the port on the **nbn** Connection Box**. This is applicable for FTTP (Fibre to the Premises), Fixed Wireless, HFC (Hybrid Fibre Coaxial), and FTTC (Fibre to the Curb) **nbn** connection types.

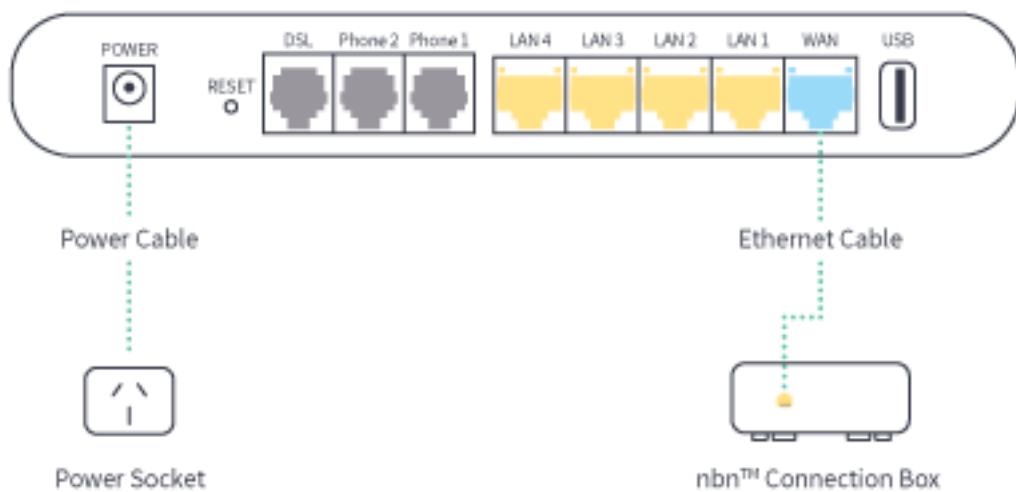

2. Connect the Phone 1 port on the back of your modem to your telephone handset, if there's any
3. Connect any of the 4 LAN ports on the back of your modem to your PC or other wired devices (optional)
4. Connect the Power port on the back of your modem to your power socket.

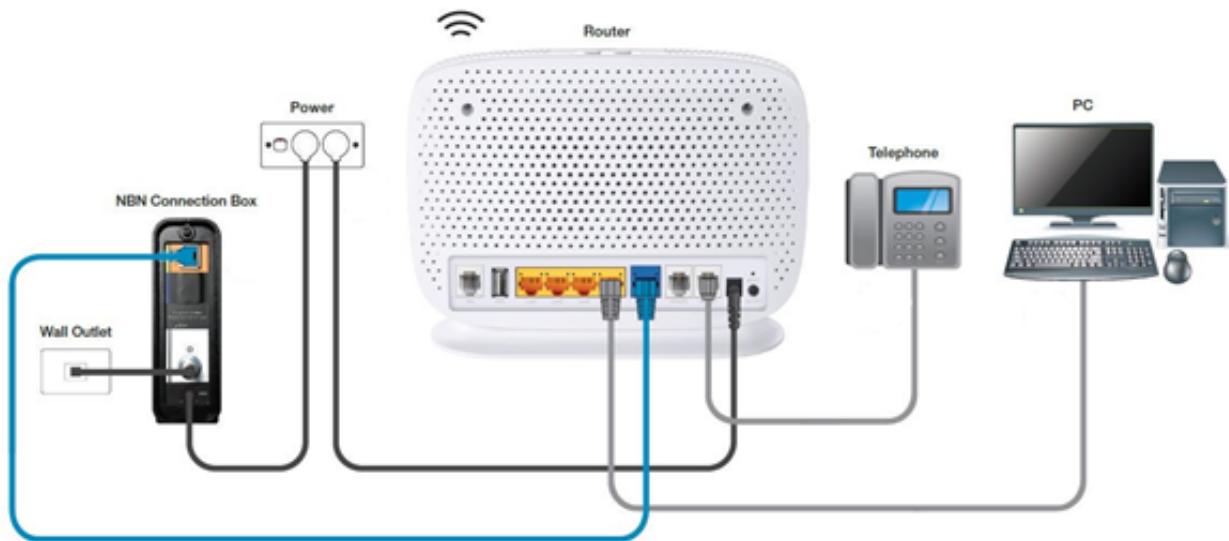

Internet Configuration for BYO Modem

Click on the link below for the common modem configuration guide.

[Common modem configuration](#)

You may also try the following settings:

Log into your modem as per the [manufacturer's instructions](#), look for "Automatic Setup", "Setup Wizard" or "Internet Options" and enter the below information based on your NBN connection type. Wait **10-15 minutes** for the modem to go online.

For FTTN/B

- WAN connection type setting - VDSL2

- WAN Service type setting: IPOE/Dynamic/DHCP/Automatic IP
- VLAN ID: Disabled/None
- *if other settings are presented, accept default values*

For FTTP, HFC, FTTC or Fixed Wireless

- WAN connection type setting - ethernet
- WAN Service type setting: IPOE/Dynamic/DHCP/Automatic IP
- VLAN ID: Disabled/None
- *if other settings are presented, accept default values*

Setting Up Your Home Phone Using BYO Modem

If you've requested a Home Phone as part of your order, you'll need to set it up. This [article](#) will take you through the required steps.

Online URL:

<https://articles.spintel.net.au/article/setting-up-your-nbn-using-your-own-byo-modem.html>