Configuring your Home Phone Using TP-Link VR2100v


Preparation: Only after you have Internet access on this router, you can set up your VOIP function successfully.

When your home phone service is activated – we will send you an email with the username and password required to set up the phone service on your modem.

Logging into your modem


To access modem gateway, enter http://192.168.1.1 in the address bar of a web browser. If the IP address does not work or if it has been changed, check your router's IP address. For instructions, click http://tplinkmodem.net or http://tpl

Log in with the password you set for the router. The default password is **admin**.

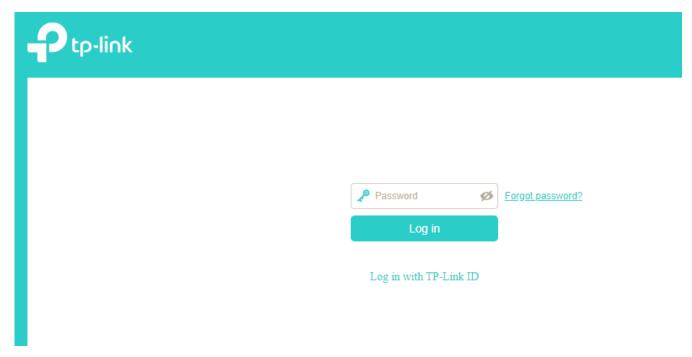

Step 1

Go to Advanced>Telephony/VoIP>Telephone Numbers, and click Add.

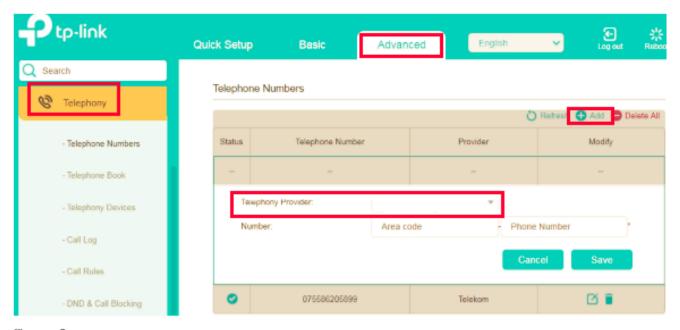

Step 2

Choose **Other** as telephony provider if SpinTel is not listed and fill in parameters required. Click **Save** to make the settings effective.

Telephone Numbers

			Refresh Add Delete All
Status Telepho	ne Number	Provider	Modify
-	-	-	-
Telephony Provider.	Other		
Phone Number:	(SIP	username)	
Registrar Address:	203	23.236.96	
Authentication ID	(SIP	username)	
Password:	(Provi	ded in the email) 🦽	
0			Ŭ €
Advanced			
Registrar Port:	5060		
SIP Proxy:	203.2	23:236:96	
SIP Proxy Port:	5060		
Outbound Proxy:	203.2	23.236.96	
Outbound Proxy Port:	5060		
Register via Outbou	nd Proxy		

Different modem manufacturers may use different titles for the below. Please

check with us if you're unsure.

• SIP Server: 203.23.236.96

• Outbound Proxy: 203.23.236.96

• **Port:** 5060

• SIP User ID: provided in the email

• Authentication ID: provided in the email

• Authenticate Password: provided in the email

• NAT Traversal: Keep-Alive

• Enable SIP Options Keep Alive: Yes

• **SIP Transport**: UDP, unless modem is 4G then TCP.

 Preferred Vocoder/Codec Preference: G711 or PCMA otherwise chose G729

Note: Other devices may ask for details such as **Authentication Number or other numbers**. Always use your **SIP Username** (provided in the email) and **NOT** your telephone number.

After saving your setup, your VoIP home phone service will then attempt to connect. Check if the phone light on your modem is ON, then test the service.

Note: Make sure to plug your home phone into the modem's phone port.

Related Articles:

- <u>Home Phone Settings</u>
- <u>Device Configuration for SpinTel Phone (VoIP)</u>
- Can't make or receive calls on your home phone?

Online URL:

https://articles.spintel.net.au/article/configuring-your-home-phone-using-tp-link-vr2100v.html